


Fiber Optic Termination Break Out Box with Splice Bridge

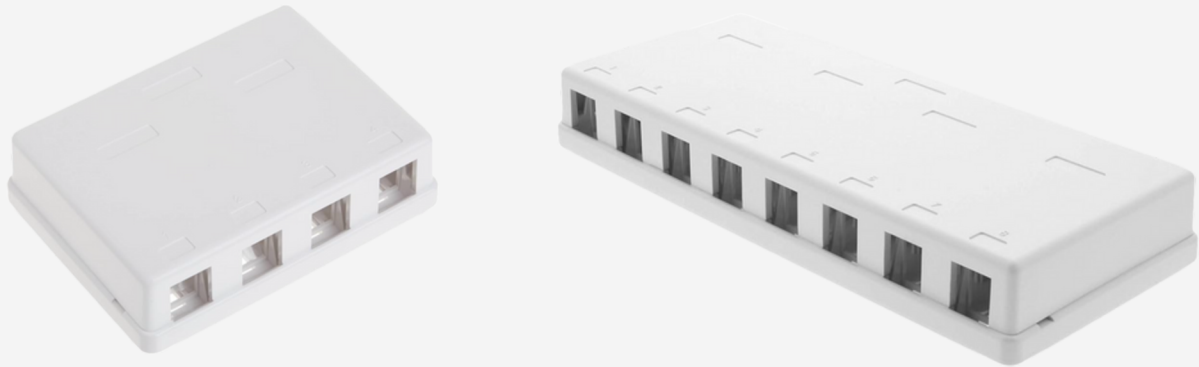

DESCRIPTION

FABNET Surface Mount Box is the ideal solution for efficient fiber optic cable management. Its compact, space-saving design simplifies installation and cable management. A built-in fiber spool in the base protects and secures cable slack in place. The box offers a variety of mounting options. Surface mount box is made of high-quality and durable ABS materials and has passed the fire-resistance rating, temperature, and aging tests.

APPLICATIONS

- Optical fiber communication system
- Telecom, FTTH, Optical CATV and LAN applications.
- Wall box connection interface
- Accepts Keystone modules and Adapters

SPECIFICATIONS & FEATURES

- Made of ABS flame retardant material.
- Compatible with different sockets: network, audio, video sockets
- Provide stability and flexibility of installation
- Available in 2/4/6/8/12 port
- Complied ROHS

PHYSICAL & ENVIRONMENTAL PROPERTIES

Environmental Space	Indoor	Material	ABS flame retardant
Colour	White	No of Ports	2/4/6/8/12
RoHS	Compliant	Flame Rating	UL 94-V0
Storage Temperature	-10° to 75°	Operating Temperature	-10° to 70°
Module Type	Keystone	Range of Mode	Copper or Fiber

ORDERING INFORMATION

FSM*PW Fiber Optic Termination Break Out Box with Splice Bridge, White

- Varies (2/4/6/8/12) Ports